

# **Commercial Gateway**

SE1000-CCG-G-S1



## All-in-one communication gateway

- Wireless connections including optional WiFi, Zigbee and GSM plug-ins
- Environmental sensors support
- Power reduction interface
- Electricity meter reader
- Non-SolarEdge inverter data loggers
- Easy installation DIN rail and wall mount



# **Commercial Gateway**

SE1000-CCG-G-S1

POWER				
Power Supply - Wall Mount	Included, 100-240VAC, EU/UK/US/AU interchangeable, 2-pin plug			
Supply Voltage	9-14			Vdc
Connector Type	terminal block			
Power Consumption	<2			W
ANALOG SENSOR INPUT				
Number of Inputs	3			
	Range	Accuracy	Resolution	
Input 1	0-30mV or 0-2V	+/- 1% f.s		
Input 2	0-2V or 0-10V		10 bit	
Input 3	-20mA – 20mA			
COMMUNICATION INTERFACES				
Ethernet Interface	10/100-BaseT			
Wireless Connections	ZigBee module <sup>(1)</sup>			
GSM Plug-in Interface	2G/3G GSM <sup>(1)</sup>			
Power Reduction Interface	4 control pins, 5V, GND			
RS485 Interface	2 ports; May be used for local connection			
SUPPORTED RS485 DEVICES(2)				
SolarEdge Devices	Yes			
Export Inverter Data	Yes			
Revenue meters	Yes			
Export Data to Non-SolarEdge Logger	Yes			
ENVIRONMENTAL				
Operating Temperatures	-20 to 60 / -4 to 140			°C/°F
Protection Rating	IP20 Indoor			
MECHANICAL				
Mounting Type	DIN Rail / Wall mount			
Dimensions (LxWxH)	165 X 90.5 X 53.5 / 6.5 X 3.56 X 2.11			mm / Inch
Weight	0.5 / 1.1			kg / lbs
STANDARD COMPLIANCE				
Safety	UL60950-1, IEC-60950-1			
EMC	FCC Part 15 class B, IEC61000-6-2, IEC61000-6-3			

<sup>&</sup>lt;sup>(1)</sup> sold separately - see individual product specs for supported locations

<sup>(2)</sup> for supported protocols and devices, see link <a href="http://www.solaredge.com/files/pdfs/se-gateway-supported-devices.pdf">http://www.solaredge.com/files/pdfs/se-gateway-supported-devices.pdf</a>



SE1000-CCG-G-S1

## **CONNECTION SCENARIOS**

Example 1

Extend the Distance of Wired Connection



Example 2

Non-SolarEdge Logger & SE Monitoring Parallel Connection



Example 3

ZigBee Wireless Server Connection





SE1000-CCG-G-S1

## **CONNECTION SCENARIOS**

Example 4

Power Reduction Interface (PRI) Connection

Example 5


**Analog Sensors Connection** 

Example 6

**Electricity Connection** 

Example 7

**GSM Connectivity** 

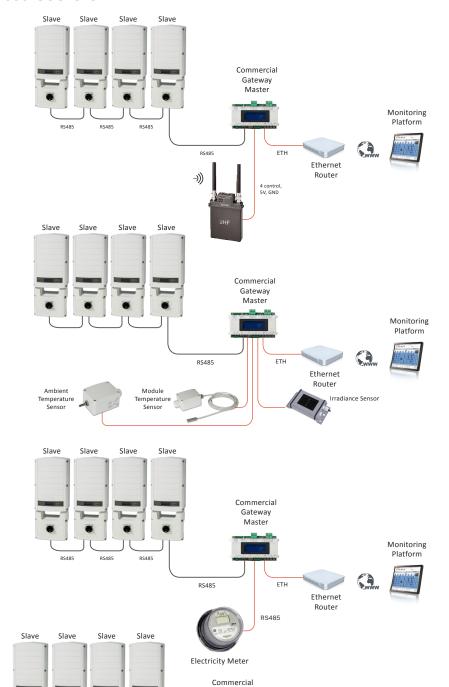

Monitoring

Platform

Cellular Tower

(((**||**))

Master

RS485 (up to 1km)

