


一、SPECIFICATIONS :

- 1、Rated Voltage: 0.66KV
- 2、Insulation Voltage: 2KV
- 3、Rated Frequency: 50HZ 或 60HZ
- 4、Operating Temperature: -15℃to 60℃
- 5、Flame resistance: UL94-V0
- 6、Certificates: CE、UL


二、FEATURES:

- 1、Small cost
- 2、Split core design ,Easier installation
- 3 Build diode ,no high voltage danger
- 4、Good linearity at very low current

三、DIMENSIONS(mm):

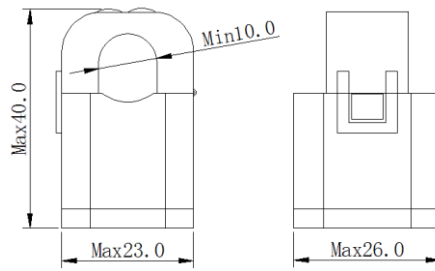

A type

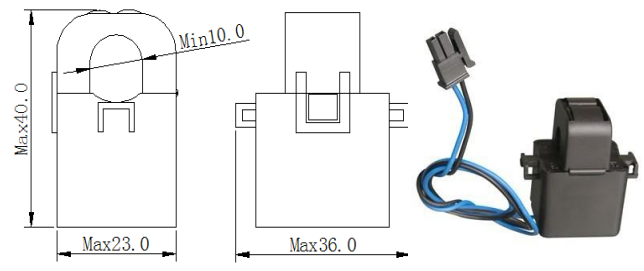

B type

四、PARAMETERS

Model	Input (A)	Max current (A)	Output
XH-SCT-T10B	5-80AAC	100AAC	0-26.6mArms

五、CURVE PERFORMANCE

